
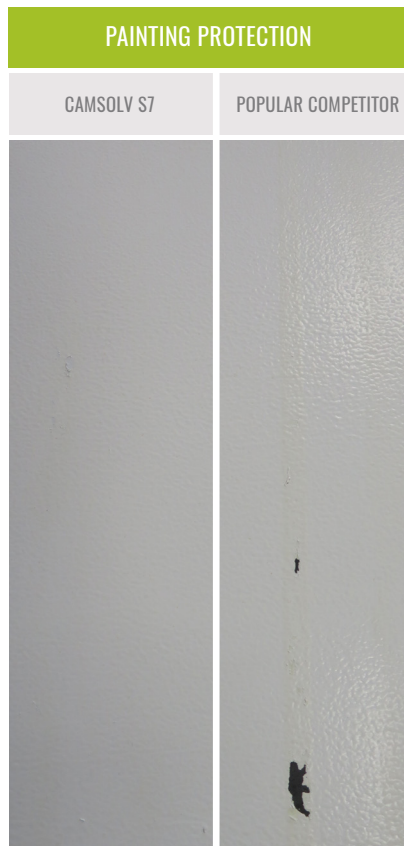
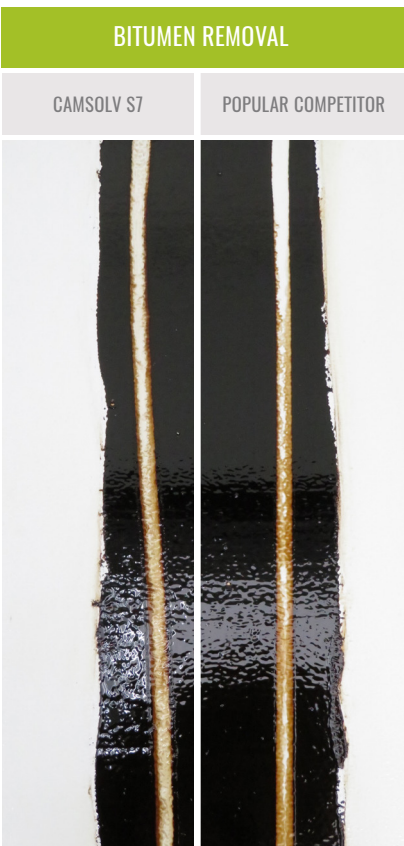


Camsolv S Series Solvents


- High solvency performance with extremely low odor and aromatic content
- High flash points
- Rheology is easily modified for vertical surface cleaning applications and enhanced contact time
- Easily formulated with synergistic surfactants

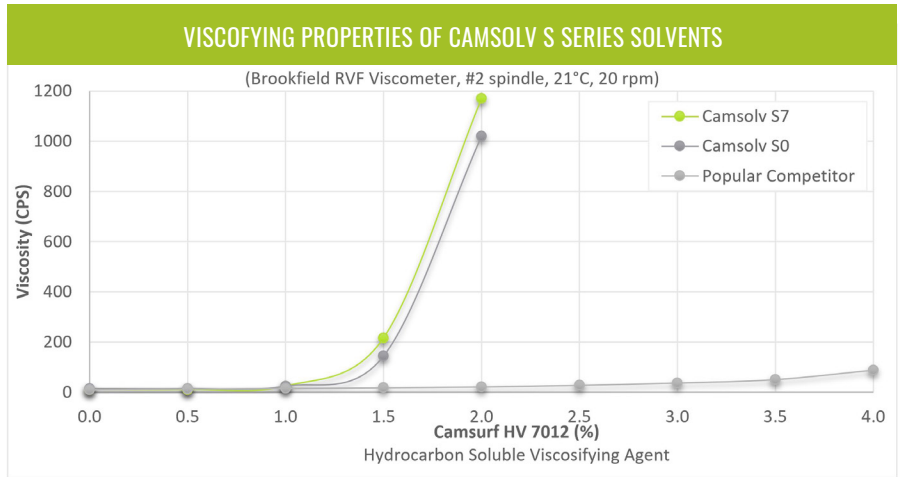

PRODUCT	FLASH POINT	AROMATIC CONTENT
Camsolv S0	> 80°C	ppb level
Camsolv S7	> 75°C	ppb level
Low Aromatic Mineral Spirits*	< 65°C	< 2 vol %

*ASTM D235-02

BITUMEN REMOVAL - STATIC TEST

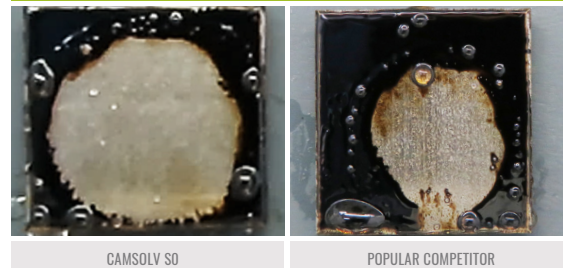

1) 50 mg of bitumen evenly spread on the metal coupon. 2) Two drops of solvent left to react for 15 minutes. 3) Rinse with water.

SOLVENT PENETRATION AFTER 5 MINUTES

